


PRODUCT FEATURES

- * ETL/DLC certification for all products
- * SEOUL best lamp bead ratio
- * High parameter output,PPE reaches 2.8 μ mol/J
- * Full spectrum
- * Suitable for full voltage Optional 100~277V and 277~480V
- * The PPF of the whole lamp is as high as 2300 μ mol/s
- * DIMMING + manual dimming
- * Quality assurance for 5 years
- * Feature 1:1 HPS Replacement
- * Feature 2:Energy Saving

DIMENSIONS

Dimensions (mm/in)			Weight(kg/lbs)
L	W	H	
650/25.59	260/10.24	110/4.33	12.3/27.12


Light Distribution Curve of Indoor Lamps/Spatial Isoluminance Curve

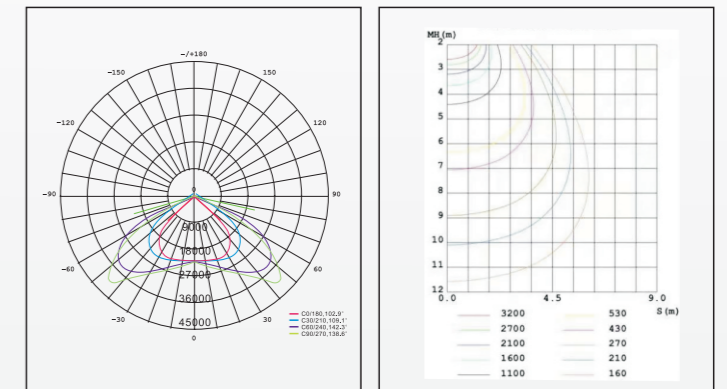

SPECIFICATIONS

Input Power	820W
Power Factor	>0.99
Input Voltage	Optional 100~277V and 277~480V
Light Source	SEOUL
Spectrum	Full Spectrum
PPF	2300 μ mol/s
Efficacy	2.8 μ mol/J
Dimming Option	0-10V
Light Distribution	120°
Waterproof Rate	IP66
Lifetime	L90:>54000hrs
Warranty	5 Years Warranty

SPECTRUM

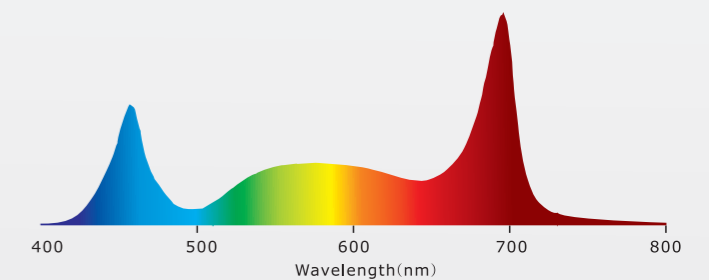

PLUTO PRO820
LED GROW LIGHTS SERIES

2.8 μ mol/j
full spectrum, efficiency
up to 2.8 μ mol/j

0-10V dimming
Intelligent control design
and Dimming knob

54000hrs
Long life time:
L90:>54000hrs



Add:Building 2,Fubang xueyuan C, Lane 56, 1956,Xueyuan South Rd,
Xialin Street,Chengxiang District,Putian city,Fujian Province,CN

Web:www.beltri.cn

E-mail:shawn@beltri.cn;

TEL:0594-2063066

BelTri Inc.