

GROW LIGHT 650W



650W



RJ14 systems



Highest 1788 $\mu\text{mol/s}$ Output Optimize Your Crop /Flower bloom

- 1788 $\mu\text{mol/s}$, high PPF
- 1352 $\mu\text{molm}^{-2}\text{s}^{-1}$ at 1ft, highest PPFD
- Easy to install in any sized indoor grow room
- It's flexibly used in vertical rack/grow tents

2.75 $\mu\text{mol/J}$

1788 $\mu\text{mol/s}$




5 years warranty



FEATURES

Full-Spectrum High efficiency spectrum

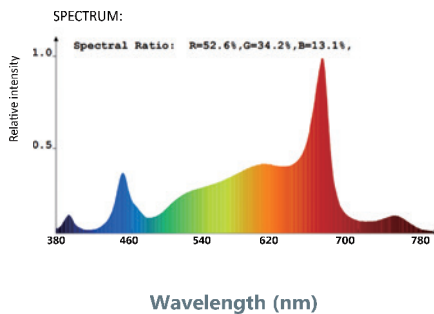


High photon uniformity

636	669	754	771	783	817	849	940	823	804	722	647	535
604	711	768	821	859	885	886	974	861	841	743	657	561
636	718	784	829	880	900	919	905	802	862	759	667	578
613	729	797	833	897	912	923	928	881	882	767	686	589
699	733	797	863	909	931	917	944	896	885	773	692	599
700	721	799	858	916	936	847	951	922	900	770	682	602
674	703	800	855	917	936	944	950	926	894	778	690	577
671	721	800	859	914	927	936	943	924	881	764	676	592
679	728	797	848	900	909	921	925	914	856	749	673	608
672	726	781	831	878	889	862	897	881	840	738	646	598
658	710	768	811	846	856	861	857	881	842	738	646	558
587	644	720	771	815	814	909	811	821	810	700	629	547
552	586	648	685	762	800	800	809	822	809	698	622	534

5'X 5' = 835 $\mu\text{molm}^{-2}\text{s}^{-1}$
average PPFD-2ft height

High PPFD

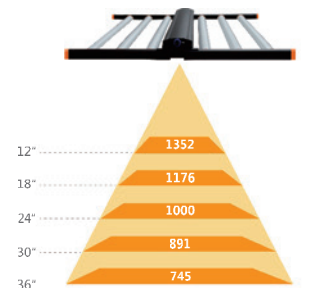

Max PPFD: $\mu\text{molm}^{-2}\text{s}^{-1}$


Max PPFD 1352 $\mu\text{molm}^{-2}\text{s}^{-1}$
at 1ft height

High quality chips



Plant growth uniformity

Even heat distribution



6-bar metal design for
efficient heat dissipation


Full metal design



Ideal for single-tier tables and
benches or multi layer racks

650W

Flowering growth

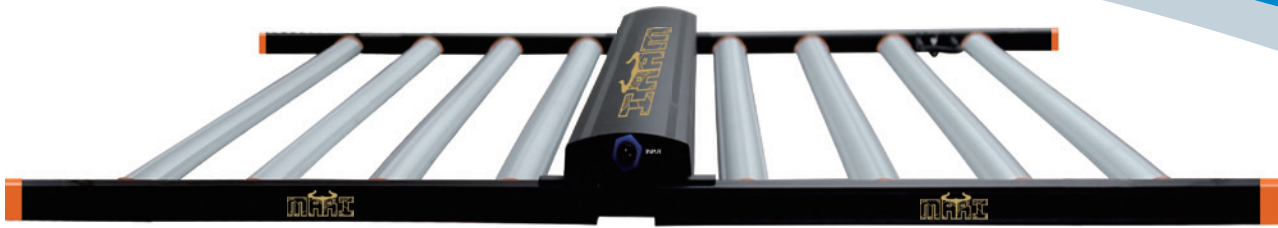


Highest 1788 $\mu\text{mol/s}$ Output Optimize Your Crop /Flower Bloom

Product Scene




Features & Benefits

Model	BD-06X-650W
Dimension(mm)	L1190xW190xH655mm
Spectrum	3000K+5000K+660nm+UV+IR
Warranty	5 years
Power consumption	650W \pm 5%
Input Voltage	100-277V
Input Current	6.5A@100V / 2.3A@277V
Frequency	50/60Hz
Working temperature	-20-40 $^{\circ}$ C
Waterproof degree	IP65
Power Factor	>0.96@240VAC
Dimming	Knob Dimming(0-10V Optional)
PPF($\mu\text{mol/s}$)	1788 $\mu\text{mol/s}$
Efficacy ($\mu\text{mol/J}$)	2.75 $\mu\text{mol/J}$ @277Vac
Packing size	1190x200x545mm
Net Weight(KGS)	8.2 KGS
Gross Weight(KGS)	11 KG

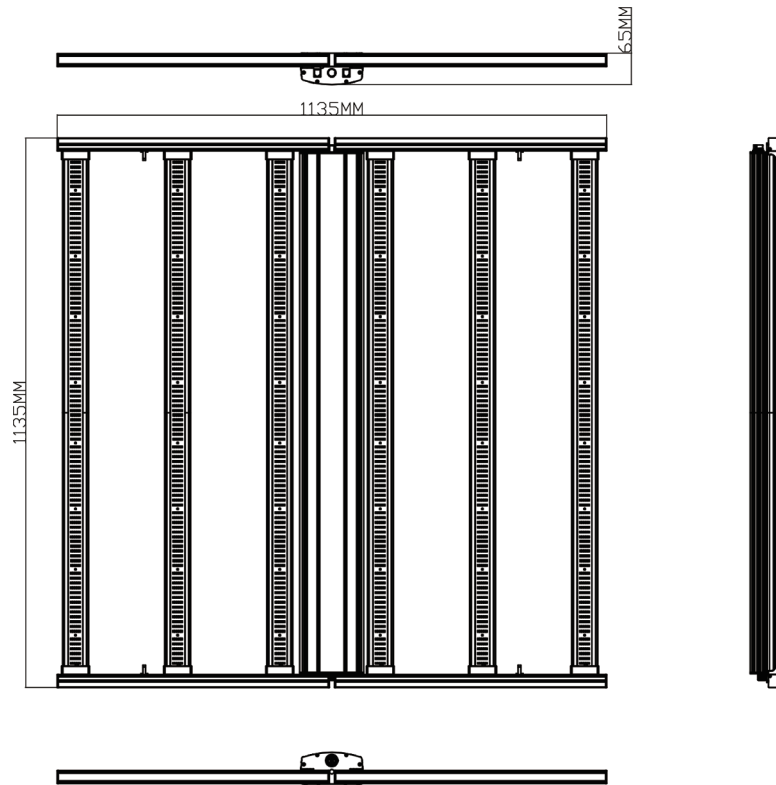

Installation diagram

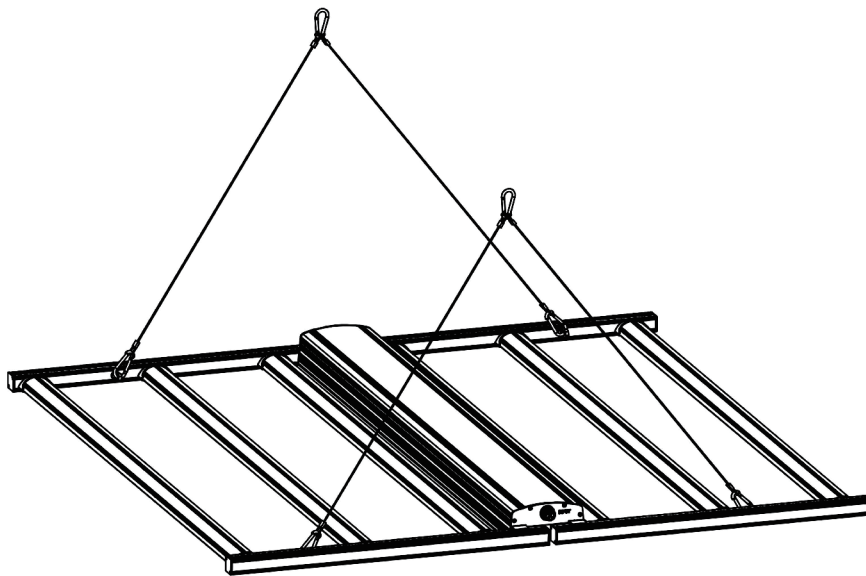

Add: Building 2, Fubang xueyuan C, Lane 56, 1956, Xueyuan South Rd,
Xialin Street, Chengxiang District, Putian city, Fujian Province, CN

Web: www.bel-tri.com

E-mail: shawn@beltri.cn

TEL: 0594-2063066