


GROW LIGHT 1000W





RJ14 systems



Highest 2750 $\mu\text{mol/s}$ Output Optimize Your Crop /Flower bloom

- 2750 $\mu\text{mol/s}$, high PPF
- 2123 $\mu\text{molm}^{-2}\text{s}^{-1}$ at 1ft, highest PPFD
- Easy to install in any sized indoor grow room
- It's flexibly used in vertical rack/grow tents

2.75
 $\mu\text{mol/J}$

2750
 $\mu\text{mol/s}$




5
years
warranty



FEATURES

Full-Spectrum High efficiency spectrum

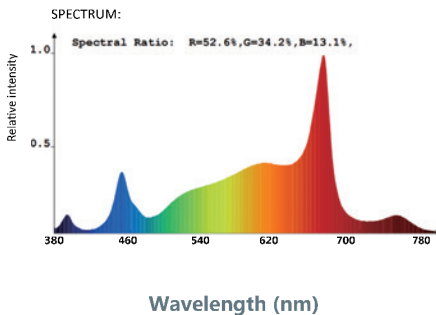


High photon uniformity

850	1020	1150	1254	1241	1331	1351	1318	1301	1174	1038	912	821
919	1136	1228	1305	1349	1380	1410	1387	1382	1230	1118	971	856
1000	1149	1248	1340	1388	1410	1439	1427	1407	1301	1124	997	840
1054	1160	1275	1352	1418	1470	1470	1473	1444	1301	1149	1000	878
1100	1175	1275	1360	1436	1471	1491	1490	1460	1337	1171	1040	880
1122	1160	1275	1361	1450	1482	1500	1497	1462	1310	1155	1042	890
1072	1138	1255	1356	1485	1495	1505	1495	1463	1331	1181	1041	908
1070	1140	1243	1362	1443	1476	1498	1486	1454	1376	1169	1040	897
1063	1190	1268	1336	1423	1463	1478	1458	1419	1306	1131	1035	896
1073	1153	1240	1310	1380	1499	1437	1415	1389	1296	1142	1022	885
1033	1137	1219	1286	1350	1366	1380	1384	1342	1253	1118	994	874
954	1044	1170	1224	1295	1297	1312	1295	1282	1276	1096	974	851
864	948	1110	1158	1224	1254	1255	1267	1268	1253	1056	959	835

5'X 5' = 1300 $\mu\text{molm}^{-2}\text{s}^{-1}$
average PPFD-2ft height

High PPFD

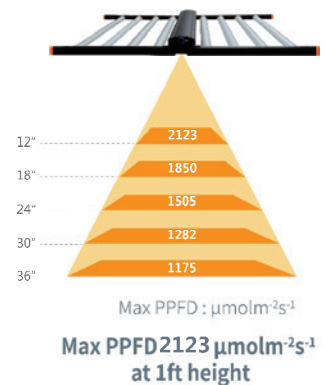


High quality chips



Plant growth uniformity

Even heat distribution



8-bar metal design for
efficient heat dissipation

Full metal design



Ideal for single-tier tables and
benches or multi layer racks

1000W

Flowering growth




Highest 2750 μ mol/s Output Optimize Your Crop /Flower Bloom

Product Scene




Features & Benefits

Model	BD-08X-1000W
Dimension(mm)	L1135xW1135xH65mm
Spectrum	3000K+5000K+660nm+UV+IR
Warranty	5 years
Power consumption	1000W \pm 5%
Input Voltage	200-277V
Input Current	5.1A@200V / 3.6A@277V
Frequency	50/60Hz
Working temperature	-20-40 $^{\circ}$ C
Waterproof degree	IP65
Power Factor	>0.96@240VAC
Dimming	Knob Dimming(0-10V Optional)
PPF(μ mol/s)	2750 μ mol/s
Efficacy (μ mol/J)	2.75 μ mol/J @277Vac
Packing size	1190x190x655mm
Net Weight(KGS)	11.5 KGS
Gross Weight(KGS)	14.2 KG

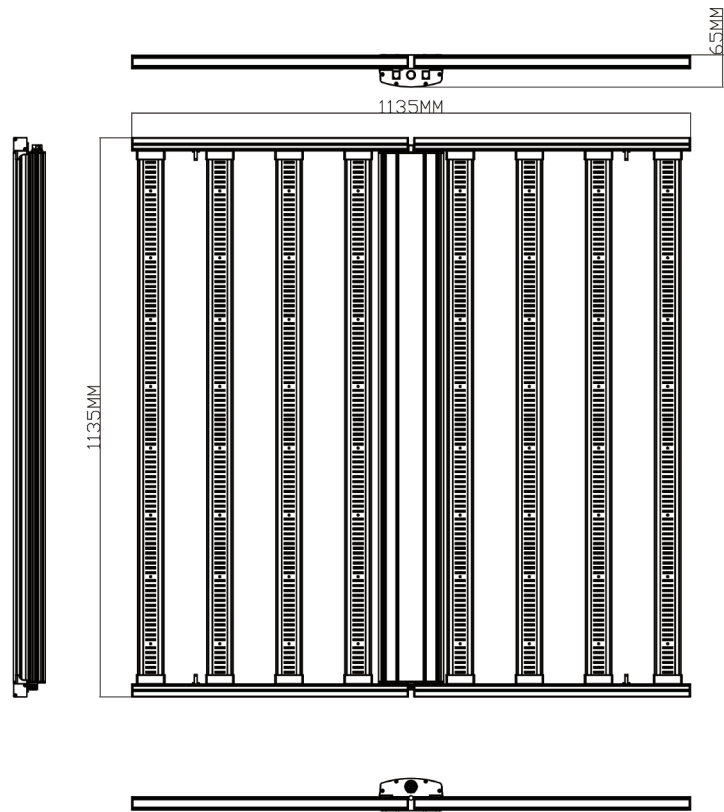

Installation diagram

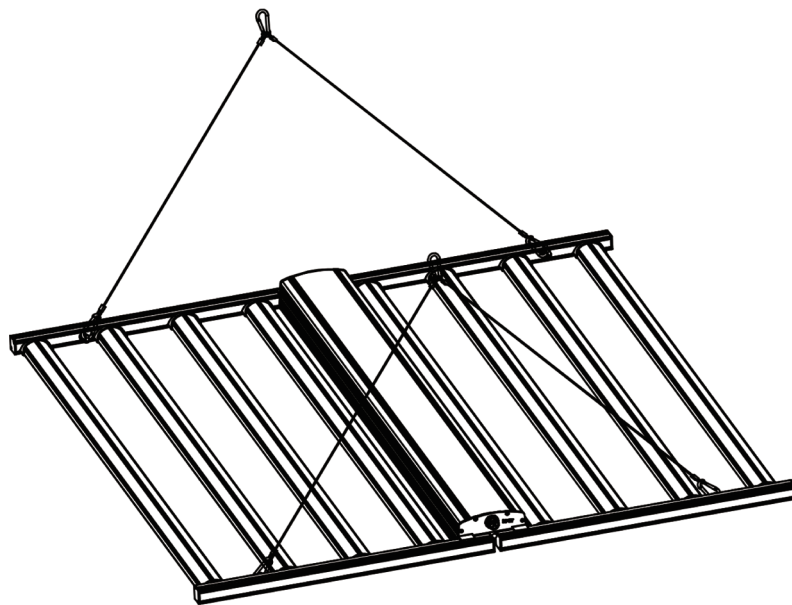

Add: Building 2, Fubang xueyuan C, Lane 56, 1956, Xueyuan South Rd,
Xialin Street, Chengxiang District, Putian city, Fujian Province, CN

Web: www.bel-tri.com

E-mail: shawn@beltri.cn

TEL: 0594-2063066