

ULIGHT 780W Dual Spectrum Fixture

780W DUAL

White+Red:MAX:720W

UV+FR:MAX:60W





- High Efficiency, High Yield
- Dual Dimmable-Built-in Booster & 2 Channel 0-100%
- High Efficiency Customized Dual Channel Driver
- Sturdy Structure, Larger Lighting Area
- More Bars, Better Heat Management

Our ER-06B-780W LED Grow Light is brilliantly designed to be a direct, fitting seamlessly into existing HPs layouts. The ER-06B-780W is a high efficiency, low heat generation, full-spectrum LED grow light that saves up to 30% in energy consumption versus 1000W HPS lights. The ER-06B-780W is ideal for either indoor or greenhouse cultivations.


ULIGHT 780W Dual Spectrum Fixture

SPECIFICATIONS

Booster OFF

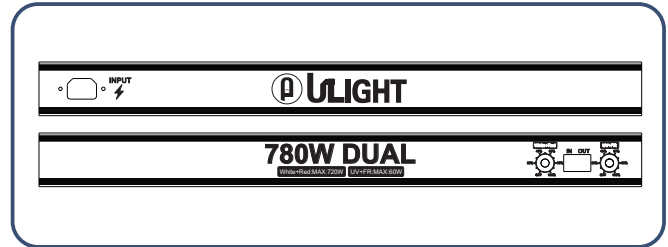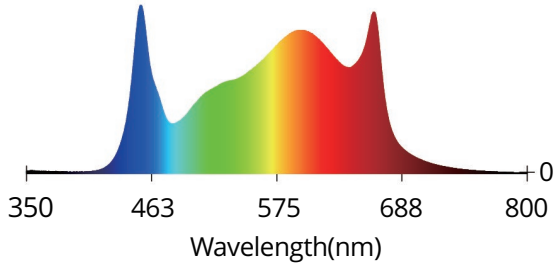

Booster ON

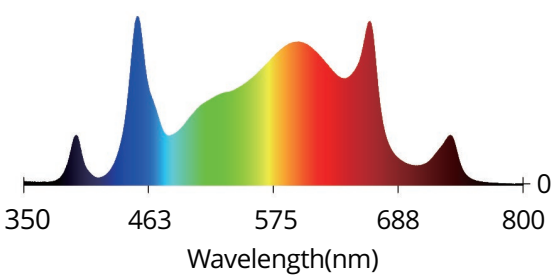


2.7
 $\mu\text{mol/J}$

2106
 $\mu\text{mol/s}$


IP66

3
years
warranty

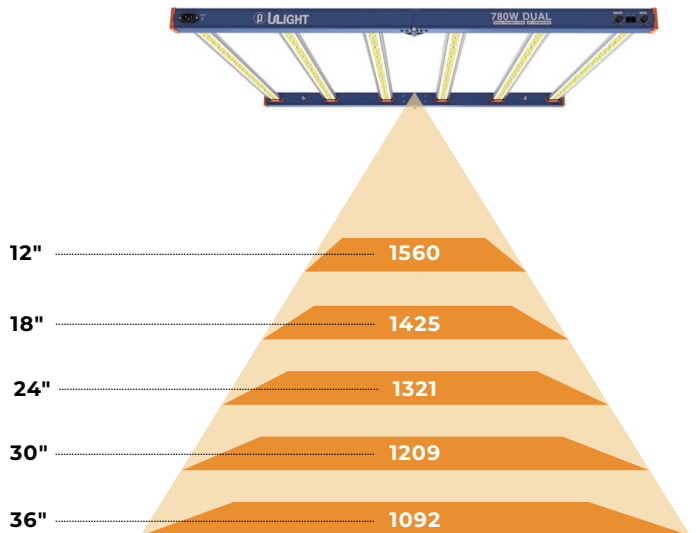

**ULIGHT****SPECIFICATIONS**

Light Version	ER-06B-780W
AC Input Power	780W (White+Red:720W) (UV+FR:60W)
Light Source	LED
Spectrum	Full Spectrum
Efficacy up to	2.7umol/j
PPF(380-780nm) up to	2106 umol/s
AC Input Voltage	200-277V/AC
Frequency	50/60Hz
Light Distribution	120°
Mounting Height	>12" Above Canopy
Thermal Management	Passive
Operation Humidity	10%to95%rh
Controlled Environment	Indoor stacked or Non-stacked, Greenhouse, Top light
Dimming	0-10V
Power Factor	> 0.95
Total Harmonic Distortion	<10%
Certifications	CE RoHs
IP Rating	IP65
Warranty	3 Years Limited Warranty
Overall Dimensions	1100X1155X60MM
LED Fixture Weight	12.3kg